

Lead Free* Water Connector Solutions

Dormont Hi-PSI® Flex water connectors provide long, trouble-free service life, and permit quick, safe connection of hot and cold water service lines to moveable/castered and stationary food service equipment. Listed to NSF, these water connectors are composed of a stainless steel corrugated tube covered with a tight weave stainless steel braid. An optional gray PVC antimicrobial coating prevents the growth of bacteria, mold, and mildew.


Water Connectors

Applications:

Utility distribution systems, steam kettles, steamers, ice machines




- Stainless steel corrugated hose with braid
- 150 PSI maximum; hot water temperatures up to 225°F (107°C)
- NSF Listed to NSF/ANSI 169 and NSF/ANSI 372
- Available with PVC Coating or without

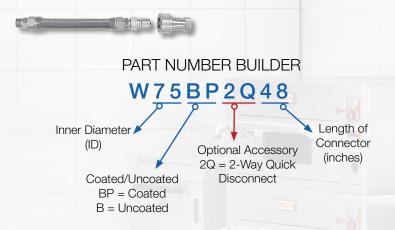

Combi-Oven Water Connectors



- Stainless steel corrugated hose with braid
- Gray antimicrobial PVC coating
- Double Shut-off Quick Disconnect
- 125 PSI maximum; hot water temperatures up to 500°F (260°C)
- Lead Free* garden hose adapter
- NSF Listed to NSF/ANSI 169 and NSF/ANSI 372

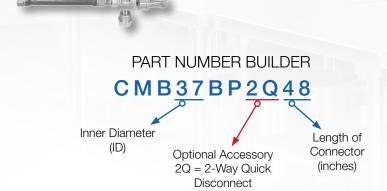

^{*}The wetted surface of this product contacted by consumable water contains I ss than 0.25% of lead by weight.

Lead Free* Steam Connector Solutions

Dormont Lead Free* steam connectors provide a long, trouble-free service life while permitting quick, safe connection of steam lines to caster-mounted and stationary foodservice equipment.

Steam Connectors

Applications:

Appliance requiring a steam connection (steam kettles, steam tables, braising pans, steamers, combi ovens)




- Stainless steel corrugated hose with braid
- Orange Insulating sleeve and heat shield
- Available with Double Shut-Off Quick Disconnect
- 125 PSI maximum; hot water temperatures up to 500°F (260°C)
- NSF Listed to NSF/ANSI 372

PART NUMBER BUILDER

H50BIP2Q24

Inner Diameter (ID)

Optional Accessory 2Q = 2-Way Quick Disconnect Length of Connector (inches)



Dormont Swirl Hose

The Dormont Lead Free* Swirl Hose quickly and easily connects water-fed appliances and equipment to the water supply line, making it easy to move equipment for cleaning without disconnecting the water supply. The flexible design of the swirl hose easily extends and retracts without damage.

Applications:

Ice machines, beverage equipment, coffee brewers, steamers, and more.



- Made of durable, retractable, NSF-certified polyurethane
- Will not kink or crack like ordinary copper tubing
- NSF Listed to NSF/ANSI 169 and NSF/ANSI 372
- Available with Double Shut-off Quick Disconnect



PART NUMBER BUILDER*
71-1114-48

Inner Diameter (ID) End Fitting Options Length of Connector Elbow, Flare Adapter & Quick Disconnect

Options

MMM

*Please reference the Dormont Foodservice Catalog for a full list of component configurations

Commercial Kitchens







The Dormont Difference

For 70+ years, the Food Service Industry has trusted Dormont. Get the same quality, flexibility, and safety trusted in commercial kitchens across the globe at Dormont, your one-stop shop for safe gas, water, and steam connectors.

Scan for the full Dormont Foodservice Catalog



